


# QuietAir QT150

Kitchen ventilation



## KEY FEATURES

- Two speed ventilation up to 72 l/s (260 m³/h)
- Power consumption from only 6 W
- Interval timer for routine auto extraction
- Long-life ball bearings with approx. 40,000 hr life
- Variable speed control version
- Install in a kitchen / light commercial
- 3 year warranty



The high-performance QuietAir QT150 is engineered to deliver extraction rates that surpass the standards set by the latest Building Regulations. Ideal for kitchens and larger rooms.


Designed and engineered in Germany, the QuietAir range features high-efficiency, low-energy, and ultra-quiet performance. With a variety of controls and features, there is a perfect solution for every application. The simple and compact design will fit perfectly with your decor.

This elegant, discreet axial fan range includes various control options that activate the fan only when needed - remote switching, timer, humidity timer, and motion sensor with timer. By using exceptionally low energy, it helps reduce carbon emissions and save on energy bills.

Room refresh (interval timer) enables automatic extraction at pre-set times if required.

## MODELS


Basic	Control by remote switch
Timer	Features a 6-21 minute overrun and automatic room refresh at 8, 12 or 24 hour intervals
Humidity Timer	Adjustable Humidity 60 to 90% RH with adjustable timer
Variable speed	Control by remote variable speed controller

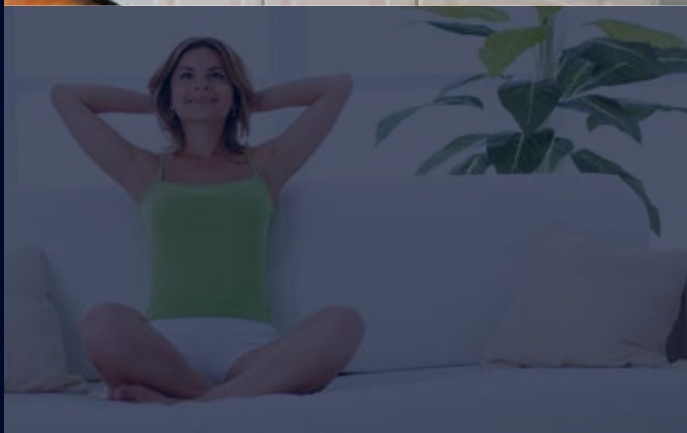

## TECHNICAL DATA

Specification	QuietAir QT150B	QuietAir QT150T	QuietAir QT150HT	QuietAir QT150VS
Air flow m <sup>3</sup> /h	220 / 260			50 - 260
Air flow l/s	61 / 72			13 - 72
Fan type	Axial			
Controls	Basic	Timer	Humidity Timer	Variable Speed
Mounting	Wall / Ceiling			
Sound pressure dB(A)@3 m	35 / 39			
Delay start (sec's)	No	0, 45, 90, 120	0, 45, 90, 120	No
Adjustable timer (mins)	No	6, 10, 15, 21	6, 10, 15, 21	No
Adjustable humidity (%RH)	-	-	60 - 90	-
Interval timer, auto start (hrs)	-	0, 8, 12, 24	-	-
Power Watts	6 / 10			
Amps	0.07 / 0.12			
Specific Fan Power (SFP)	0.09 / 0.13			
Building Regulations ADF	Yes			
Duct Diameter (mm)	150			
Voltage	230 V / 1 ph / 50 Hz			
Rating	IP45			
Max ambient temperature	40°C			
Weight (kg)	1.2			
Dimensions (H x W x D) mm	210 x 210 x 190			
Part No.	90000454	90000455	90000456	90000458
EAN Barcode	5019009317656	5019009317663	5019009317670	5019009317687
Variable speed controller				90000514
EAN Barcode				5019009318790

## DIMENSIONS

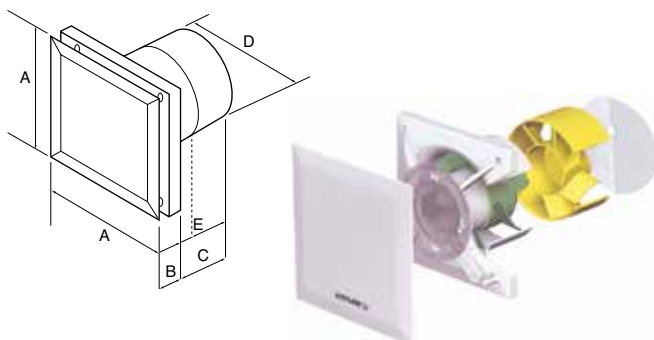

Model	A	B	C	D	E
QuietAir QT150	210	48	142	145	76

## CONTROLS & ACCESSORIES



Others products available from [airflow.com](http://airflow.com)

Call: 01494 525252

Visit: [airflow.com](http://airflow.com)



**Airflow Developments Limited**  
Aidelle House, Lancaster Road,  
Cressex Business Park,  
High Wycombe, Buckinghamshire,  
United Kingdom, HP12 3QP

E-mail: [info@airflow.com](mailto:info@airflow.com)  
Telephone: +44 (0) 1494 525252

[airflow.com](http://airflow.com)

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80001416 - Issue 6 09/25